

Bright, low debris, ultrashort hard x-ray table top source using carbon nanotubes

Suman Bagchi,^{1,2} P. Prem Kiran,^{1,2} K. Yang,³ A. M. Rao,³ M. K. Bhuyan,⁴ M. Krishnamurthy,¹ and G. Ravindra Kumar¹

¹Tata Institute of Fundamental Research, 1 Homi Bhabha Road, Mumbai 400005, India

²Advanced Centre of Research in High Energy Materials (ACRHEM), University of Hyderabad, Hyderabad 500046, India

³Department of Physics and Astronomy, Clemson University, Clemson, South Carolina 29634, USA

⁴Department d'Optique P. M. Duffieux, Institut FEMTO-ST, CNRS UMR 6174, Université de Franche-Comté, 25030 Besançon, France

(Received 6 July 2010; accepted 2 December 2010; published online 11 January 2011)

We demonstrate that carbon nanotube coated surfaces produce two orders of magnitude brighter hard x-ray emission, in laser produced plasmas, than planar surfaces. It is accompanied by three orders of magnitude reduction in ion debris which is also low Z and nontoxic. The increased emission is a direct consequence of the enhancement in local fields and is via the simple and well known “lightning rod” effect. We propose that this carbon nanotube hard x-ray source is a simple, inexpensive, and high repetition rate hard x-ray point source for a variety of applications in imaging, lithography, microscopy, and material processing. © 2011 American Institute of Physics.

[doi:10.1063/1.3531685]

Currently major efforts are being expended on tailoring plasma x-ray sources produced by ultrashort laser pulses. Typical targets are planar solids,^{1–3} though microsphere,⁴ nanoparticle⁵ coated surfaces, as well as microdroplets⁶ and gaseous clusters^{7–9} are beginning to be explored. While such sources offer great promise—particularly in the hard x-ray region—their efficiencies are low (typically¹⁰ 10^{-7} at 10^{17} W cm⁻²) and the laser intensity required is still quite high ($>10^{16}$ W cm⁻²); the latter factor limits the repetition rates of these sources. There is a great and urgent need to find compact, high repetition rate, low laser intensity (10^{14} – 10^{15} W cm⁻²) excited plasma sources that can be readily used for various scientific and technological applications. Carbon nanotubes¹¹ have been convincingly shown to be efficient emitters of electrons¹² at low applied voltages. The behavior is well explained by simple electrostatic theory¹³ and obeys Fowler–Nordheim behavior¹⁴ under dc and pulsed excitations.¹⁵ Earlier work¹⁶ has shown increased soft x-ray emission from laser plasmas created on carbon nanotube coated targets. In addition, they are good for generating ultrashort electron bunches with proven ability to generate x-rays.¹⁷ These observations spark the idea of exploiting the propensity for electron emission of carbon nanotubes to design more efficient laser produced plasma x-ray sources.

We used multiwalled carbon nanotubes (MWNTs) that were synthesized on copper substrates through the catalytic pyrolysis of a ferrocene-xylene mixture at 675 °C fed into a tubular two-stage quartz reactor.¹⁸ Scanning electron microscope (SEM) images reveal that the MWNTs have a length of 1.1 μ m and diameter of 0.1 μ m with a typical areal density of 3×10^9 cm⁻². Experimental studies¹⁹ (Fig. 1) were performed with p -polarized, 50 fs, 800 nm, 10 Hz Ti: sapphire laser (THALES, ALPHA 10) pulses. To avoid any detrimental preionization effects because of the nanosecond

prepulse, at an intensity of about 10^{16} W cm⁻², contrast ratio was carefully kept at a level better than 10^{-6} . The typical amplified spontaneous duration was 5–8 ns. The laser pulses were focused on to the target at an incident angle of 23° with respect to target normal direction by an off axis parabolic mirror to focal spot size of 10 μ m ($1/e^2$), as determined by an equivalent imaging technique. Both the targets were mounted adjacently in a vacuum chamber with a base pressure of 10^{-6} Torr. A motorized stage assembly was used to ensure those fresh target portions were exposed to each laser irradiation. Measurements of hard x-ray emission in the 50–500 keV range were performed with a calibrated NaI (TI) detector.²⁰ The NaI (TI) detector was (a) gated in time with respect to incident laser pulse to ensure background free data acquisition and (b) covered by thick lead walls and lead apertures to reduce the probability of recording “piled up” events. The signals from the detector were collected by a multichannel analyzer attached to a computer. The x-ray yield was collected over 128 laser shots at each laser intensity. The energy of the ions emitted along the target normal direction from the plasma was measured by a channel electron multiplier (CEM) device, used in proportional mode, exploiting conventional ion arrival time measurement technique. Four large annular Faraday cups¹⁹ (AnFCs) were placed at angles of 5° (FC 1), 8° (FC 2), 12° (FC 3), and 17° (FC 4) with respect to target normal direction to measure the angular distribution of the emitted ion flux.

SEM images of optically polished copper targets (Cu) and optically polished copper targets coated with MWNT are shown in Figs. 1(b) and 1(c). Figure 1(d) shows a high resolution SEM image of an individual MWNT. It is clear from Figs. 1(b) and 1(d) that the nanotubes are aligned vertical to the surface. As previously established,¹⁶ such alignment facilitates x-ray emission from the laser produced plasma. Femtosecond laser excited x-ray and ion emissions from

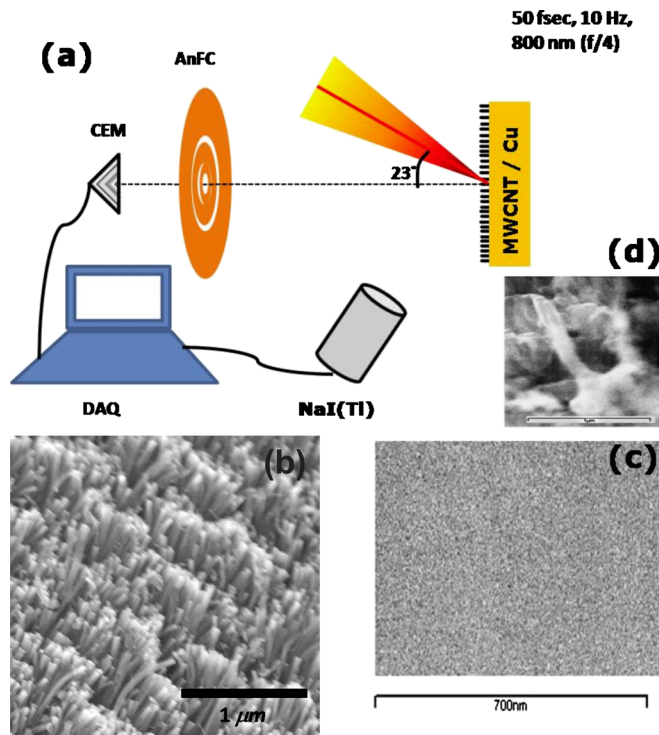


FIG. 1. (Color online) Schematic experimental arrangement is shown in (a). The ion energies along the target normal direction are measured using CEM, and AnFCs are employed to estimate the angular divergence of the ion emission. SEM image (top view) of the MWCNT and polished copper (Cu) are shown in (b) and (c), respectively. A SEM image of an individual MWCNT is shown in (d).

MWNT coated targets are compared with polished targets to establish the enhancement/suppression factors.

Comparison of bremsstrahlung emission yields clearly reveals that MWNT (black open square) samples produce two orders of magnitude more x-ray flux than Cu (red open circles) over most of the laser intensity range considered in the experiment (see Fig. 2). A typical bremsstrahlung

spectrum is shown in Fig. 2(c). A nonlinear increase in the bremsstrahlung yield from MWNT is noticed until an intensity of $5 \times 10^{16} \text{ W cm}^{-2}$ after which it exhibits a saturation behavior. To illustrate this point, the ratio of the bremsstrahlung yield (blue) from both the samples is plotted in the same graph with a different y-axis (given of right side). At higher intensities, the x-ray yield from MWNT sample shows saturation resulting in a steady decline of yield ratio (black open rhombus). This behavior is attributed to the detrimental effect¹⁹ of the rising edge of the laser pulse on the surface topology. Examining the ablated section under optical microscope reconfirms the fact that the entire coating surface is peeled off from the substrate layer. The enhanced x-ray yield, a direct measure of the “hot” electron population, clearly validates the enhanced laser absorption by the plasma^{5,21} produced on MWNT coated targets. To measure the energy of the hot electron population, bremsstrahlung spectra were recorded at an input laser intensity of $2 \times 10^{16} \text{ W cm}^{-2}$. Spectra in the energy range of 50–500 keV were recorded over 4000 independent laser shots keeping photon count rate < 0.1 per pulse to ensure rejection of “pile up” events. The measurement revealed two distinct hot electron temperature components 8 ± 1 and 36 ± 2 keV for the MWNT samples, whereas only one hot electron temperature of 9 ± 2 keV was found for polished Cu (for data on the polished copper targets please refer to our earlier work).^{5,22} The relative yields (integrated from 50 to 500 keV) of the 6 and 35 keV components are computed and we find that the latter is hundred times larger than the former for carbon nanotube (MWNT) coated substrate. This is easy to understand because the 6 keV component hardly contributes to emission above 50 keV.

Let us try to understand the origin of these temperatures. The intense, ultrashort laser pulses instantly ionizes the solid target and is further absorbed by plasma absorption processes—collisional (inverse bremsstrahlung) as well collisionless processes such as resonance absorption²³ (RA) etc.

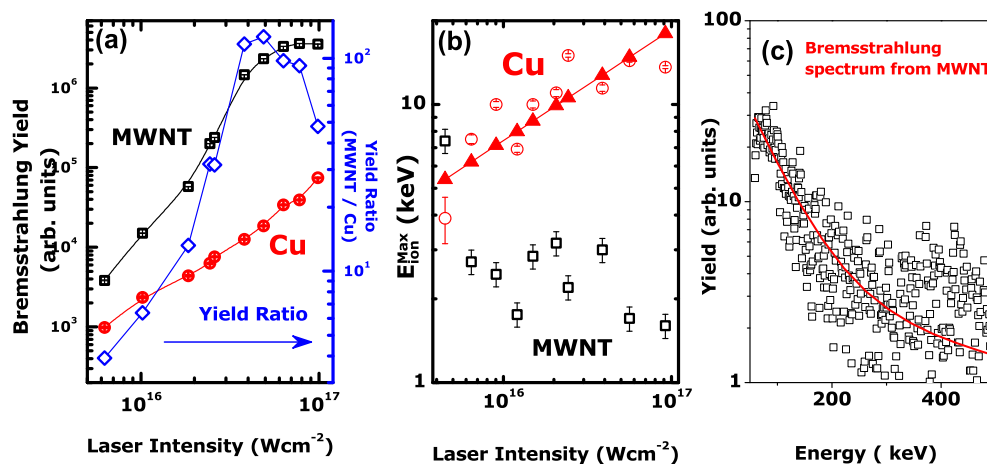


FIG. 2. (Color online) (a) Bremsstrahlung yield recorded from MWNT (black) and Cu (red) samples with laser intensity. The ratio of the bremsstrahlung yield (blue) from both the samples is plotted in the same graph with a different y-axis (right). MWNT sample produced two orders of magnitude larger x-ray flux. (b) shows the maximum ion energies recorded from MWNT (black) and Cu (red) under identical experimental conditions. The solid line in this figure shows that Cu ion energy follows $(\lambda^2)^{0.4}$ scaling. Note that MWNTs do not follow this scaling. (c) Bremsstrahlung spectrum from MWNT. The solid line shows a hot electron component at 36 keV. The low energy component is not shown here. The data for the polished Cu have been reported earlier by us. (See the references, Rajeev *et al.*, 2002 and 2003.)

At high intensities and high densities, the collisionless process dominates the plasma absorption and depletes most of the input laser energy. RA results from the damping of collective plasma wave excited by input p -polarized laser pulse. The absorbed energy is converted into the kinetic energy of hot electrons, called thus because their temperature (typically 10–20 keV even at the modest laser intensities used in this report) is much larger than the energy of the bulk of electrons in the plasma (typically, 100 eV at 10^{15} W cm $^{-2}$). These hot electrons can then release energy in the form of bremsstrahlung or characteristic x-rays. The excitation of plasma wave is strongly dependent on the input laser intensity and the hot electron temperature generated by RA can be expressed by the well known scaling law²⁴ $T_{\text{hot}} = 14(T_c I \lambda^2)^{0.33}$ where T_{hot} and T_c are the hot electron temperature and bulk plasma electron temperature expressed in keV, I is the input laser intensity expressed in units of 10^{16} W cm $^{-2}$, and λ the laser wavelength expressed in micrometers. The hot electrons also set up a potential difference that accelerates ions from the freely expanding plasma.^{25–28}

The laser pulse shining on a nanotube coated surface experiences a local electric field (and hence light intensity) amplification, simply understood to be due to the well known “lightning rod” effect.⁵ Recently, this enhancement has been modeled in great detail and simple scaling laws have emerged. The local enhancement near the tip of the nanotubes can be simply expressed¹³ as $E_{\text{local}} = 1.2(2.15 + L/r)^{0.9}$, where r and L are the radius and length of the nanotubes, respectively. In the present case ($r = 50$ nm and $L = 1100$ nm), the enhancement factor comes out to be 21 for a single nanotube. However, for an array of nanotubes, the enhancement factor is modified by screening,²⁹ the screening factor F given by $[1 - 0.7 \exp(-0.66 s/L)]$, where s is the average distance between any two neighboring nanotubes and L , the length of an individual nanotube. For our case ($s = 160$ nm), we therefore get a screened local electric field enhancement factor ($F \times E_{\text{local}}$) of 7.7.

Let us compare this with the field enhancement indicated by the measured hot electron temperatures. For the MWNT sample this is 36 keV (as compared to 9 keV for polished copper).^{5,22} From the hot electron temperature scaling law mentioned above, using a measured T_c of 0.14 keV this would indicate a local intensity enhancement of 58 times for the MWNT, which translates to a local field enhancement of ≈ 7 . Thus we see that the factor estimated purely from electrostatic field enhancement theory matches very well with that obtained from measured bremsstrahlung data. This provides a strong justification for the use of simple electrostatic local field scaling laws (which are valid under the condition that the width of the nanotube is much smaller than the wavelength of the incident light) and also provides confidence that these laws can be used for optimizing the designs of efficient x-ray emitters.

We now examine whether an increase of hot electron energies can directly lead to enhanced energetic ion emission. The maximum ion energies recorded from both the samples under identical experimental conditions are shown in Fig. 2(b). Evidently, the maximum energy of the ions emitted from Cu sample steadily increases reasonably fol-

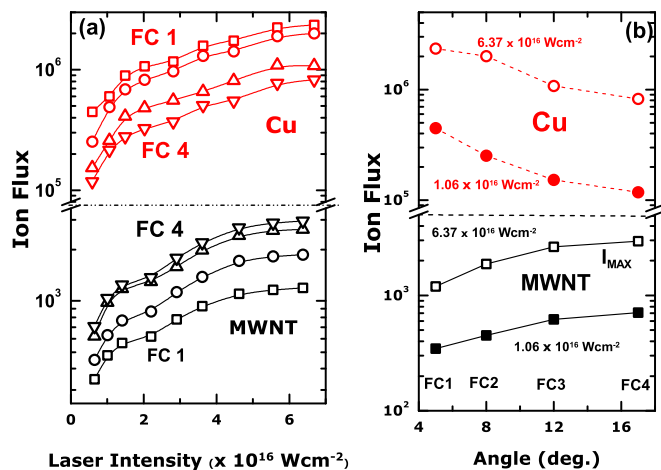


FIG. 3. (Color online) The ion flux recorded by the AnFCs for MWNT (black) and Cu (red) are shown in (a). Three orders of magnitude reduction in on debris from MWNT sample are evident. Angle resolved ion flux distribution is plotted in (b). With increasing laser intensity, the ion flux for Cu (red) peaks around the target normal direction whereas, in contradiction, in case of MWNT, the flux become more divergent in nature.

lowing a scaling law behavior of $\approx (I \lambda^2)^{0.4}$ as reported by previous measurements.^{19,30} In comparison, the MWNT sample exhibits a completely contradictory behavior. The maximum ion energies from MWNT sample steadily go down with increasing laser intensity. Notably, except at the lowest laser intensity used in the experiment, the maximum ion energies recorded from the MWNT samples are always lower than the ion energies recorded from Cu samples.

The ion accelerating electric field in intense, short pulse laser produced plasma can be written³¹ as $E_{\text{acc}} = k_B T_e / e [\max(L_n, \lambda_D)]$ where k_B is the Boltzmann constant, T_e is the hot electron temperature, λ_D is the Debye length, and L_n is the local plasma scale length. Though this model is based on the isothermal free expansion of the laser produced plasmas, it is known to explain the basic features of experimental observations satisfactorily. As we argued above, the electric field of the laser is locally enhanced near the tip of the nanotubes by the lightning rod effect and this results in early plasma formation, thereby creating a modulation in the sheath layer formed by the escaping hot electrons. A modulation in the sheath layer leads to nonplanar plasma expansion²¹ and consequently decreases ion accelerating potential leading to a reduction in emitted ion energies.^{31,33}

It is well known that the ion acceleration occurs in a direction normal to the local sheath surface;³² so a modulated sheath layer is expected³³ to give rise to a divergent ion emission which will be manifested in terms of the angular distributions of the emitted ion flux. To estimate the angular divergence of the emitted ion flux from both the surfaces, AnFCs are employed (Fig. 1) at angles of 5°, 8°, 12°, and 17° with respect to target normal direction. In Fig. 3(a) we present the ion flux recorded by AnFCs from both surfaces. It is evident that the ion flux recorded by Cu (red) is three orders of magnitude higher than MWNT (black) over the entire experimental laser intensity range of this experiment. These observations immediately point out that MWNT coated hard x-ray sources would offer the additional advan-

tage of low debris—an aspect not demonstrated with any other laser excited sources.

Figure 3 also reveals an interesting aspect about the ion angular distributions from both surfaces. For Cu, the innermost AnFC (FC 1, 5°) receives the maximum ion flux and the flux density steadily decreases as one goes further away from target normal direction, giving a bell shaped angular distribution similar to previous reports.³³ A strikingly opposite behavior is observed for MWNT. In this case, the outermost AnFC (FC 4, 17°) receives the maximum ion flux and as one goes closer to the target normal direction a monotonic reduction in ion flux is observed. To elucidate this contradictory behavior, the ion fluxes recorded from both samples at two different laser intensities 1×10^{16} and 6×10^{16} W cm⁻² are presented in Fig. 3(b). It is to be noted that apart from the resemblance to the bell shaped distribution, the ion flux distribution from Cu (red color) reveals that the angular distribution of emitted ions peaks along the target normal direction with increasing laser intensity. A contradictory behavior is observed for MWNT (in black color) where the outer FCs receive more ion flux compared to inner ones with increase in laser intensity. This indicates the extremely divergent nature of ion emission from MWNT coated surfaces. At present the exact physics issues that result in the ion reduction that is incongruent with hotter electrons are not very clear. The divergent nature of ion angular distribution does however provide a pointer to the presence of a modulation in plasma sheath layer surface caused by the local enhancement of electric field near the tips of the nanotubes.

In conclusion, we have demonstrated that carbon nanotube coated surfaces excited by moderate intensity laser pulses (10^{15} – 10^{16} W cm⁻²) offer two orders of magnitude enhancement in hard x-ray emission in the 50–500 keV region, simultaneously with three orders of magnitude suppression in ion debris. We have demonstrated x-ray enhancement at intensities larger than the lower limit stated above, but it is very likely that future efforts in target optimization can substantially lower the required laser intensities. In addition, kilohertz repetition rate femtosecond lasers that produce intensities in the range of 10^{16} – 10^{17} W cm⁻² are already available commercially paving the way for practical, tabletop hard x-ray sources operating at kilohertz repetition rates. The x-ray dosage from laser produced plasmas with a plain solid target from similar laser powers³⁴ was earlier found to be adequate for imaging applications. With a hundredfold enhancement from the MWNT coated target, such imaging applications could only be easier. The enhanced x-ray emission is simply explained by enhancement of local electric fields at the nanotubes. Our study offers clear pointers to the optimization of the physics for generating hotter plasmas and enhancing photon emissions from dense plasmas excited by femtosecond, high intensity lasers.

M.K. thanks DST, Government of India for a Swarnajayanti Fellowship and GRK acknowledges a DAE-SRC-ORI grant.

- ¹D. Giulietti and L. A. Gizzi, Riv. Nuovo Cimento **21**, 1 (1998).
- ²P. Gibbon, *Short Pulse Laser Interactions with Matter* (Imperial College Press, London, 2005).
- ³J. D. Kmetec, C. L. Gordon, J. J. Macklin, B. E. Lemoff, G. S. Brown, and S. E. Harris, *Phys. Rev. Lett.* **68**, 1527 (1992).
- ⁴H. A. Sumeruk, S. Kneip, D. R. Symes, I. V. Churina, A. V. Belolipetski, T. D. Donnelly, and T. Ditmire, *Phys. Rev. Lett.* **98**, 045001 (2007).
- ⁵P. P. Rajeev, P. Taneja, A. S. Sandhu, P. Ayyub, and G. R. Kumar, *Phys. Rev. Lett.* **90**, 115002 (2003).
- ⁶M. Anand, S. Kahaly, G. R. Kumar, M. Krishnamurthy, A. S. Sandhu, and P. Gibbon, *Appl. Phys. Lett.* **88**, 181111 (2006).
- ⁷T. Ditmire, T. Donnelly, R. W. Falcone, and M. D. Perry, *Phys. Rev. Lett.* **75**, 3122 (1995).
- ⁸Y. L. Shao, T. Ditmire, J. W. G. Tisch, E. Springate, J. P. Marongos, and M. H. R. Hutchinson, *Phys. Rev. Lett.* **77**, 3343 (1996).
- ⁹V. Kumarappan, M. Krishnamurthy, D. Mathur, and L. C. Tribedi, *Phys. Rev. A* **63**, 023203 (2001).
- ¹⁰J. Yu, Z. Jiang, J. C. Kieffer, and A. Krol, *Phys. Plasmas* **6**, 1318 (1999).
- ¹¹S. Iijima, *Nature (London)* **354**, 56 (1991).
- ¹²P. G. Collins and A. A. Zettl, *Appl. Phys. Lett.* **69**, 1969 (1996).
- ¹³C. J. Edgecombe and U. Valdre, *J. Microsc.* **203**, 188 (2001).
- ¹⁴J. W. Gadzuk and E. W. Plummer, *Rev. Mod. Phys.* **45**, 487 (1973).
- ¹⁵A. L. Musatov, K. R. Izrael'yants, A. B. Ormont, A. V. Krestintin, N. A. Kiselev, V. V. Artemov, O. M. Zhigalina, and Y. V. Grigoriev, *Appl. Phys. Lett.* **87**, 181919 (2005).
- ¹⁶T. Nishikawa, S. Suzuki, Y. Watanabe, O. Zhou, and H. Nakano, *Appl. Phys. B: Lasers Opt.* **78**, 885 (2004).
- ¹⁷O. Zhou and J. P. Lu, U. S. Patent No. 6,553,096 (22 April 2003).
- ¹⁸R. Andrews, D. Jacques, A. M. Rao, F. Derbyshire, D. Qian, X. Fan, E. C. Dickey, and J. Chen, *Chem. Phys. Lett.* **303**, 467 (1999).
- ¹⁹S. Bagchi, P. P. Kiran, M. K. Bhuyan, S. Bose, P. Ayyub, M. Krishnamurthy, and G. R. Kumar, *Appl. Phys. B: Lasers Opt.* **88**, 167 (2007).
- ²⁰G. F. Knoll, *Radiation Detection and Measurement* (Wiley, New York, 1989).
- ²¹S. Bagchi, P. P. Kiran, M. K. Bhuyan, S. Bose, P. Ayyub, M. Krishnamurthy, and G. R. Kumar, *Appl. Phys. Lett.* **90**, 141502 (2007).
- ²²P. P. Rajeev, S. Banerjee, A. S. Sandhu, R. C. Issac, L. C. Tribedi, and G. Ravindra Kumar, *Phys. Rev. A* **65**, 052903 (2002).
- ²³W. L. Kruer, *The Physics of Laser Plasma Interactions* (Addison-Wesley, New York, 1988).
- ²⁴D. W. Forslund, J. M. Kindel, and K. Lee, *Phys. Rev. Lett.* **39**, 284 (1977).
- ²⁵P. Mora, *Phys. Rev. Lett.* **90**, 185002 (2003).
- ²⁶R. Decoste and B. H. Ripin, *Phys. Rev. Lett.* **40**, 34 (1978).
- ²⁷L. M. Wickens, J. E. Allen, and P. T. Remsby, *Phys. Rev. Lett.* **41**, 243 (1978).
- ²⁸P. Mora and R. Pellat, *Phys. Fluids* **22**, 2300 (1979).
- ²⁹M. Lim, D. Kim, S. Y. Kim, and J.-E. Bouree, *J. Phys. A: Math. Theor.* **40**, 853 (2007).
- ³⁰E. L. Clark, K. Kruschelnik, M. Zepf, F. N. Beg, M. Tatarakis, M. Machacek, M. I. K. Santala, I. Watts, P. A. Norreys, and A. E. Dangor, *Phys. Rev. Lett.* **85**, 1654 (2000).
- ³¹S. C. Wilks, A. B. Langdon, T. E. Cowan, M. Roth, M. Singh, S. Hatchett, M. H. Key, D. Pennington, A. Mackinnon, and R. A. Snavely, *Phys. Plasmas* **8**, 542 (2001).
- ³²A. Zhidkov, A. Sasaki, and T. Tajima, *Phys. Rev. E* **61**, R2224 (2000).
- ³³M. Roth, A. Blazevic, M. Geissel, T. Schlegel, T. E. Cowan, M. Allen, J. C. Gauthier, P. Audebert, J. Fuchs, J. Meyer-ter-Vehn, M. Hegelich, S. Karsch, and A. Pukhov, *Phys. Rev. ST Accel. Beams* **5**, 061301 (2002).
- ³⁴S. Svanberg, *Meas. Sci. Technol.* **12**, 1777 (2001).

Bright, safe X-ray

New research has shown that focusing ultrashort pulses of a femtosecond laser onto a copper surface coated with multiwalled carbon nanotubes (MWNTs) can produce intense hard X-rays with low ion debris¹. Such hard X-ray sources have a variety of applications in imaging, lithography, microscopy and materials processing.

The researchers used carbon nanotubes, which, when coated on a surface, generate ultrashort electron bunches that produce hard X-rays. They focused ultrashort pulses of a femtosecond laser onto two surfaces: a MWNT-coated copper surface and a bare polished copper surface. The intense, ultrashort laser pulses instantly ionize the solid target, creating hot electrons that ultimately release energy in the form of X-rays.

The experiments revealed that the MWNT-coated surface produced an X-ray flux that was two orders of magnitude more intense and with three orders of magnitude better suppression in ion debris than the polished copper target.

The researchers explain the enhanced X-ray emission by an enhancement of local electric fields at the nanotubes. "Our study offers clear pointers to the optimization of the physics for generating hotter plasmas and enhancing photon emissions from dense plasmas excited by femtosecond, high-intensity lasers," says lead researcher G. Ravindra Kumar.

The authors of this work are from: *Tata Institute of Fundamental Research, Mumbai, and Advanced Centre of Research in High Energy Materials (ACRHEM), University of Hyderabad, Hyderabad, India, Department of Physics and Astronomy, Clemson University, Clemson, South Carolina, USA and Department d'Optique P. M. Duffieux, Institut FEMTO-ST, Universite de Franche-Comte, Besancon, France.*

References

1. Bagchi, S. *et al.* Bright, low debris, ultrashort hard X-ray table top source using carbon nanotubes. *Phys. Plasma.* **18**, 014502 (2011) | [Article](#)

Nature India EISSN 1755-3180

About NPG
Contact NPG
RSS web feeds
Help

Privacy policy
Legal notice
Accessibility statement
Terms



Nature News
Naturejobs
Nature Asia
Nature Education

Search:

AIP | **Physics of Plasmas**

Volume/Page	Keyword	DOI	Citation	Advanced
Volume:	Page/Article:	<input type="button" value="GO"/>		

[Home](#) [Browse](#) [About](#) [Authors](#) [Librarians](#) [Features](#) [Purchase Content](#) [Advertisers](#) [Scitation](#) [AIP Journals](#)

[Read the article](#)

[Current Issue](#)
[Submit Manuscript](#)
[Papers in Press](#)
[Top 20 Most Downloaded](#)

Announcements


The 2010 Nobel Prize in Physics Announced

The 2010 Nobel Prize in Physics was awarded to Andre Geim and Konstantin Novoselov from the University of Manchester for their "groundbreaking experiments regarding the two-dimensional material graphene." [Read more](#) | [Resources](#)



ADVERTISEMENT

Research Highlights




Bright, low debris, ultrashort hard x-ray table top source using carbon nanotubes

Suman Bagchi, P. Prem Kiran, K. Yang, A. M. Rao, M. K. Bhuyan, M. Krishnamurthy, and G. Ravindra Kumar

Carbon nanotube coated surfaces are shown to produce two orders of magnitude brighter hard x-ray emission in laser produced plasmas, than planar surfaces. We propose that this carbon nanotube hard x-ray source is a simple, inexpensive, and high repetition rate hard x-ray point source for a variety of applications in imaging, lithography, microscopy, and material processing.

Phys. Plasmas **18**, 014502 (2011)




Model experiment of cosmic ray acceleration due to an incoherent wakefield induced by an intense laser pulse

Y. Kuramitsu, N. Nakanii, K. Kondo, Y. Sakawa, Y. Mori, E. Miura, K. Tsuji, K. Kimura, S. Fukumochi, M. Kashiwara, T. Tanimoto, H. Nakamura, T. Ishikura, K. Takeda, M. Tambo, R. Kodama, Y. Kitagawa, K. Mima, K. A. Tanaka, M. Hoshino, and H. Takabe

Large amplitude light waves are considered to be excited in the upstream regions of relativistic astrophysical shocks and the wakefield acceleration of cosmic rays can take place. By substituting an intense laser pulse for the large amplitude light waves, such shock environments were modeled in a laboratory plasma. In the incoherent wakefield the maximum energy can be much larger than one in the coherent field due to the momentum space diffusion or the energy diffusion of electrons.

Phys. Plasmas **18**, 010701 (2011)




Debye screening and injection of positrons across the magnetic surfaces of a pure electron plasma in a stellarator

Benoit Durand de Gevigney, Thomas Sunn Pedersen, and Allen H. Boozer

For pure electron plasmas, the screening of large negative potentials is fully nonlinear and deviates significantly from the textbook Debye screening. Such potentials create an evacuated region that may penetrate a long distance away from the source of the potential perturbation. An analytic model for this case is presented and compared to numerical solutions of the pure electron plasma equilibrium equation in a stellarator.

Phys. Plasmas **18**, 013508 (2011)

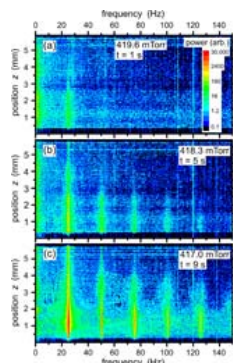

Development of nonlinearity in a growing self-excited dust-density wave

T. M. Flanagan and J. Goree

As it propagates through a dusty plasma, a wave grows and harmonics are generated. In this research, the amplitudes, wave numbers, and growth rates are measured for the fundamental and its harmonics. The energy in the harmonic modes exhibits a strong exponential increase with diminishing gas pressure, until it levels off at lower gas pressures.

Phys. Plasmas **18**, 013705 (2011)

[More Research Highlights](#)

James F. Drake, Phys. Plasmas Associate Editor, announced as the 2010 James Clerk Maxwell Prize recipient. [Read more](#)

NEW! iResearch reader for iPhone and iPod touch

Sign up for AIP's free social networking service UniPHY

Papers from the 51st Annual Meeting of the APS Division of Plasma Physics

REVTeX 4.1 released with AIP style files included

Multimedia now available

[More Announcements](#)

Plenary Talks Given at the 50th Division of Plasma Physics Meeting

Selected Highly Cited Papers from 50 Years of Plasma Physics

Review Articles

Special Topics

APS-DPP Special Issues

Maxwell Prize Winners

Your paper may receive additional media coverage through AIP EurekAlert.

Your paper may receive additional exposure in the Virtual Journal series.

Nanoscale Science & Technology

Ultrafast Science

Scitation

AIP Journals

Rev. Sci. Instrum.

AIP Conference Proceedings in Plasma Physics

Physics Today

Comput. Sci. & Eng.

Physics Today Jobs

PACS: Physics & Astronomy Classification Scheme®

FYI: The AIP Bulletin of Science Policy News

DBIS: Discoveries & Breakthroughs Inside Science

Physics Success Stories

Inside Science News Service

Physics News Update: The AIP Bulletin of Physics News

AIP Statistical Research Center

AIP Center for History of Physics

Article Packs

Purchase articles from AIP Journals and Proceedings for as little as **\$2.50!**

